

University of Groningen

High Frequency High Spectral Resolution Focal Plane Arrays for AtLAST

Baryshev, Andrey

DOI:
[10.5281/zenodo.1159021](https://doi.org/10.5281/zenodo.1159021)

IMPORTANT NOTE: You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.

Document Version
Publisher's PDF, also known as Version of record

Publication date:
2018

[Link to publication in University of Groningen/UMCG research database](#)

Citation for published version (APA):
Baryshev, A. (2018). *High Frequency High Spectral Resolution Focal Plane Arrays for AtLAST*. 10.
<https://doi.org/10.5281/zenodo.1159021>

Copyright


Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

The publication may also be distributed here under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license. More information can be found on the University of Groningen website: <https://www.rug.nl/library/open-access/self-archiving-pure/taverne-amendment>.

Take-down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Downloaded from the University of Groningen/UMCG research database (Pure): <http://www.rug.nl/research/portal>. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.

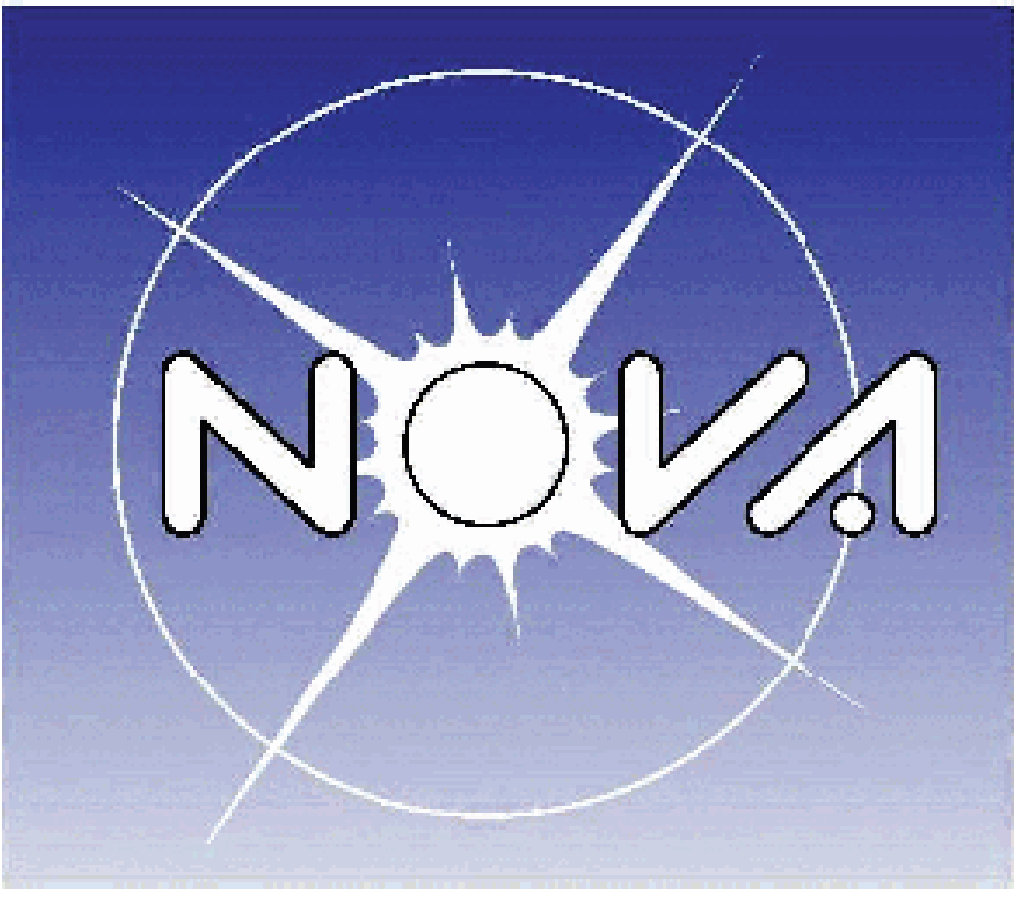

High Frequency High Spectral Resolution Focal Plane Arrays for AtLAST

A. M. Baryshev¹, A. Khudchenko¹, F. P. Mena², K. Rudakov¹, R. Hesper¹

¹ - NOVA/Kapteyn Astronomical Institute, University of Groningen, The Netherlands.
² - Electrical Engineering Department, University of Chile, Santiago, Chile.

Abstract


Large collecting area single dish telescope such as ATLAST will be especially effective for medium (R~1000) and high (R~100000) spectral resolution observations. Large focal plane array is a natural solution to increase mapping speed. For medium resolution direct detectors with filter banks (KIDs) and or heterodyne technology can be employed. We will analyze performance limits of comparable KID and SIS focal plane array taking into account quantum limit and high background condition of terrestrial observing site. For large heterodyne focal plane arrays, a high current density AIN junctions open possibility of large instantaneous bandwidth >40%. This and possible multi frequency band FPSs presents a practical challenge for spatial sampling and scanning strategies. We will discuss phase array feeds as a possible solution, including a modular back-end system, which can be shared between KID and SIS based FPA. Finally we will discuss achievable sensitivities and pixel counts for a high frequency (>500 GHz) FPAs and address main technical challenges: LO distribution, wire counts, bias line multiplexing, and monolithic vs. discrete mixer component integration.

$T_{\text{int}} \sim T_{\text{sys}}^2/N$ is figure of merit


- Very important to have very good pixel noise
- Must have 2SB scheme for high frequencies

Because of square dependence of integration time from system noise temperature it is very important to maintain performance of single element array at the same level as good single pixel system where performance of ALMA front-end is good reference for AtLAST system. No compromises are acceptable. For the same reason, array pixel element at high frequency must deviate from simple DSB scheme and use 2SB or any other suitable SSB scheme.


We are on the ground!

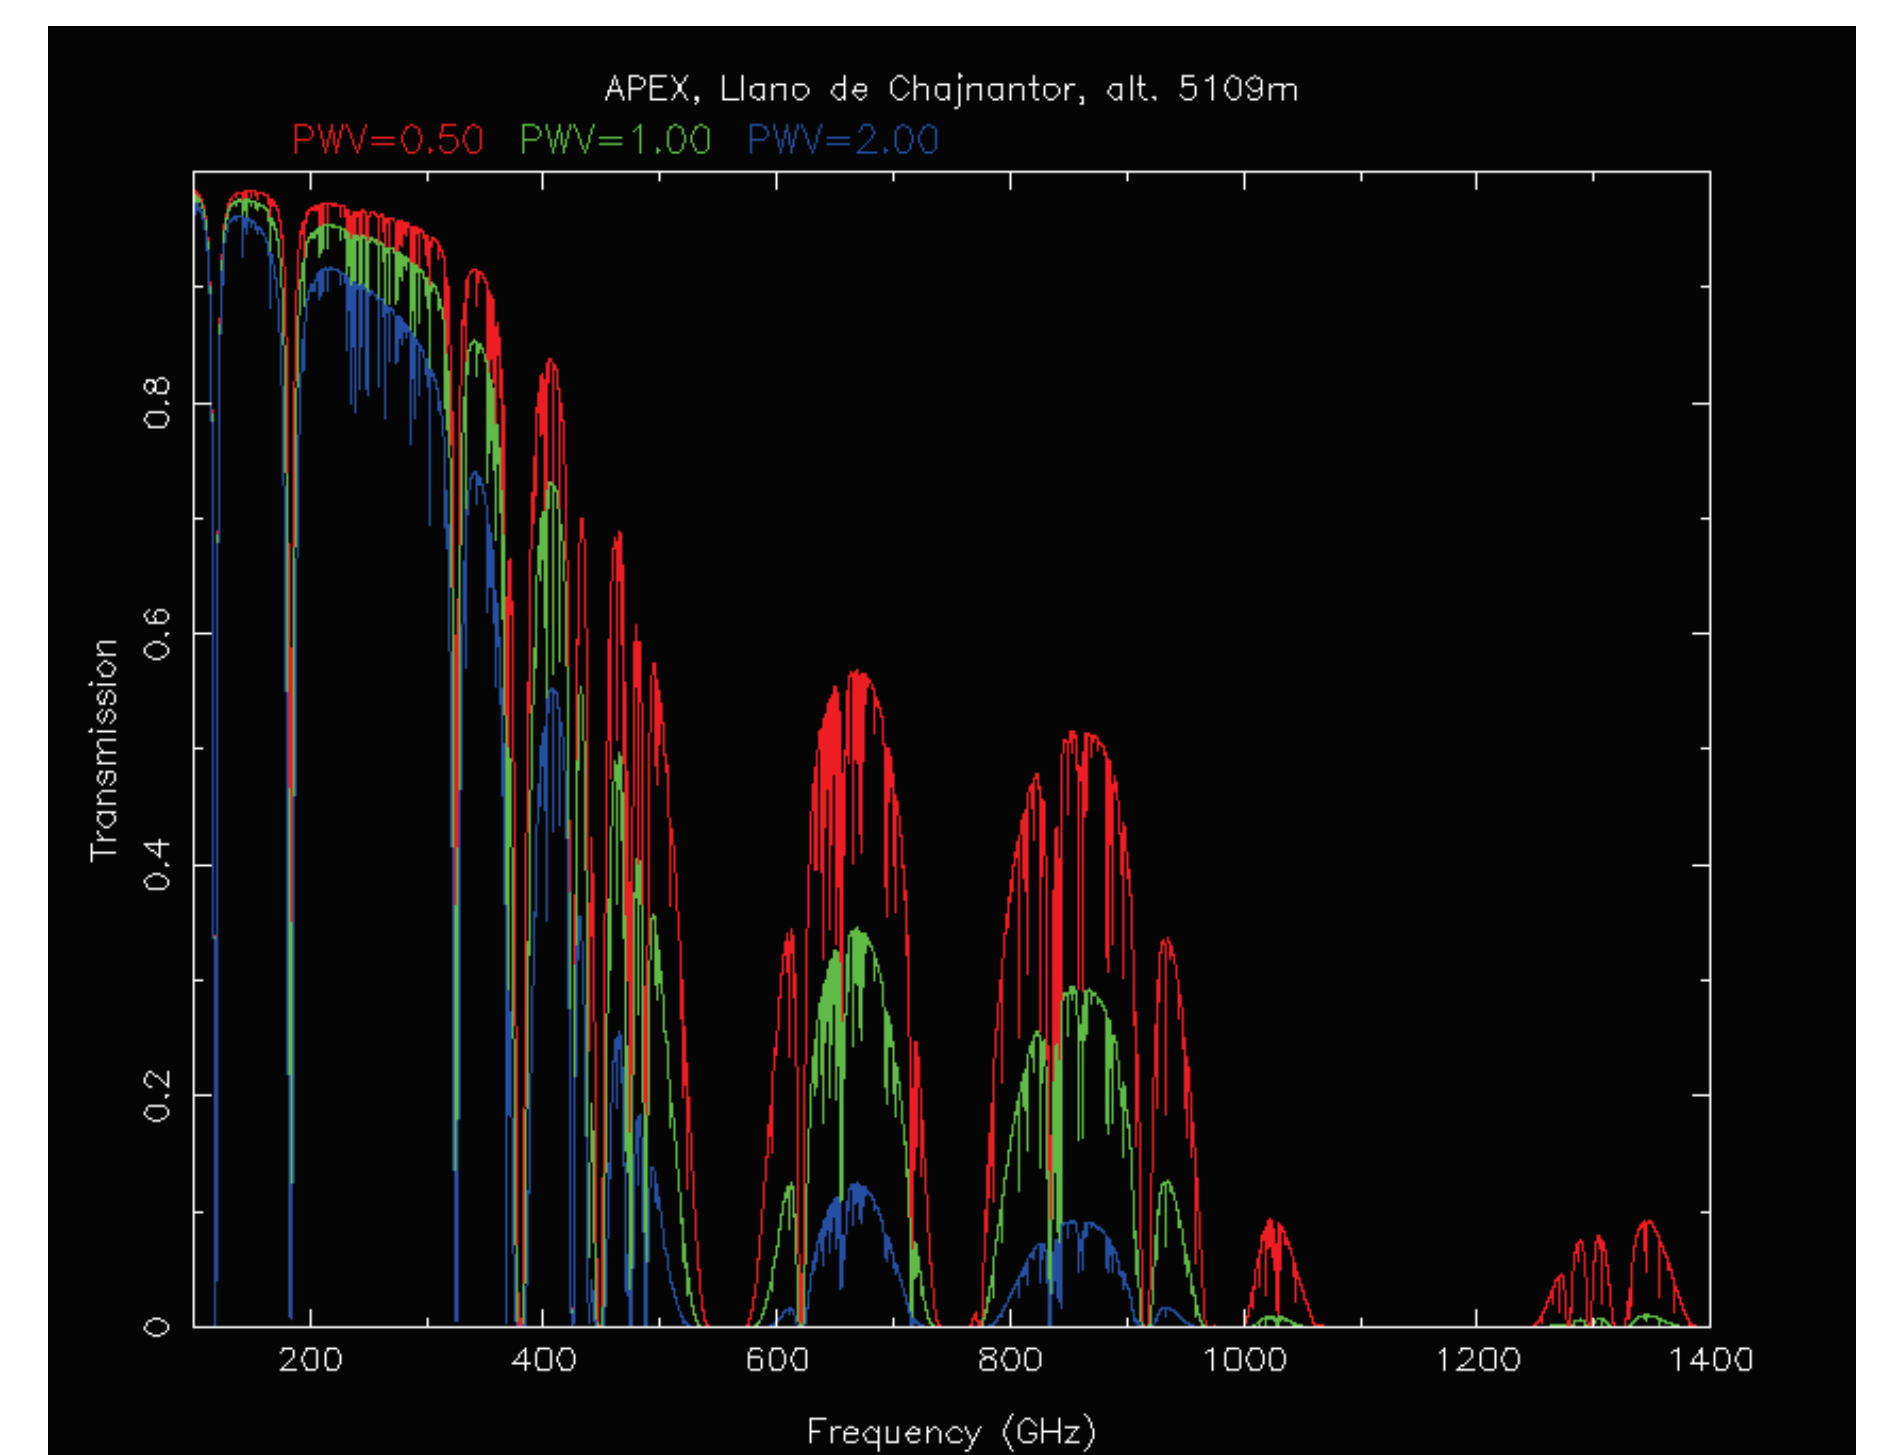


Single pixel module of high frequency FPA, 650 GHz band example

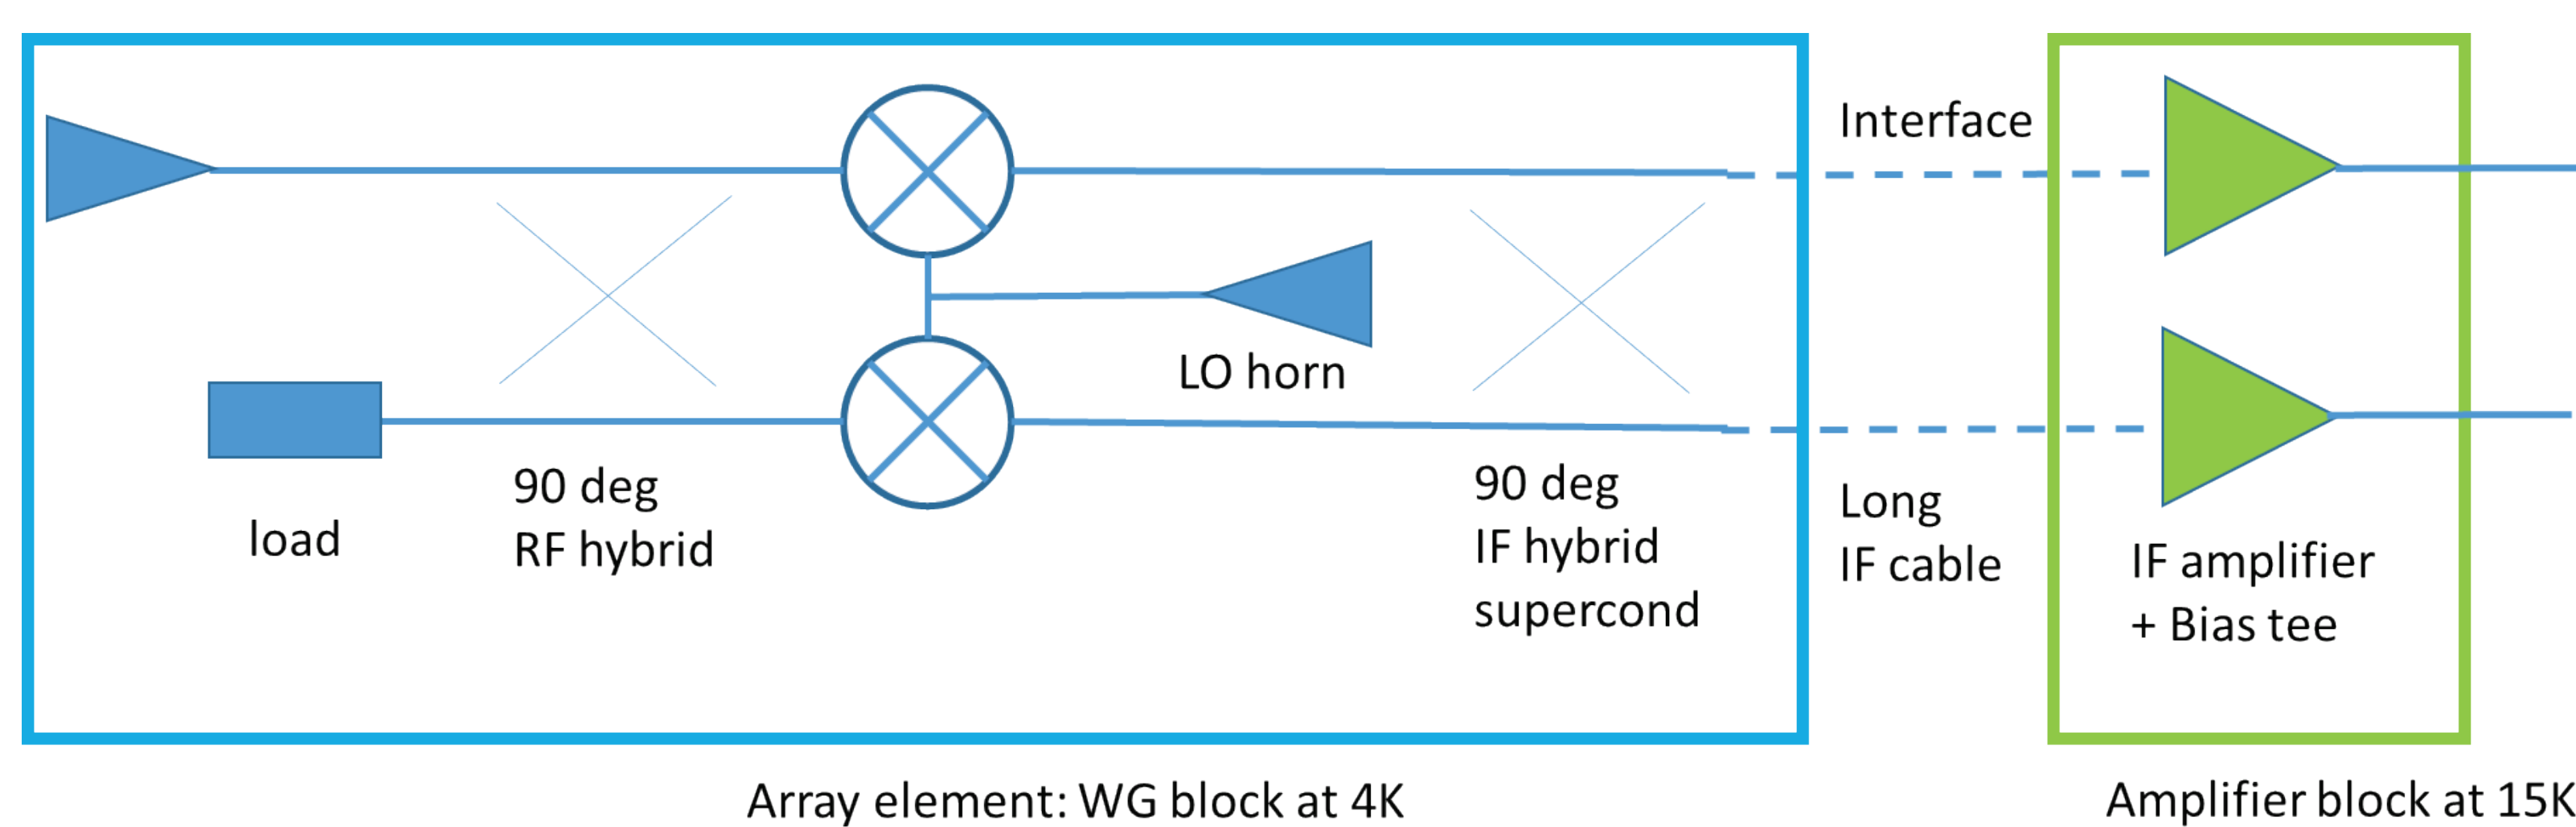


Principle mixer layout realized for ALMA band 9 2SB upgrade project and SEPIA 650 GHz channel at APEX telescope. Note absence of cryogenic isolator. This makes it possible to expand IF bandwidth to 32 GHz in this system (Measured is 3-12 GHz IF band). IF amplifiers can be located far from mixer and can even be on different temperature level, which is important for focal plane array implementation

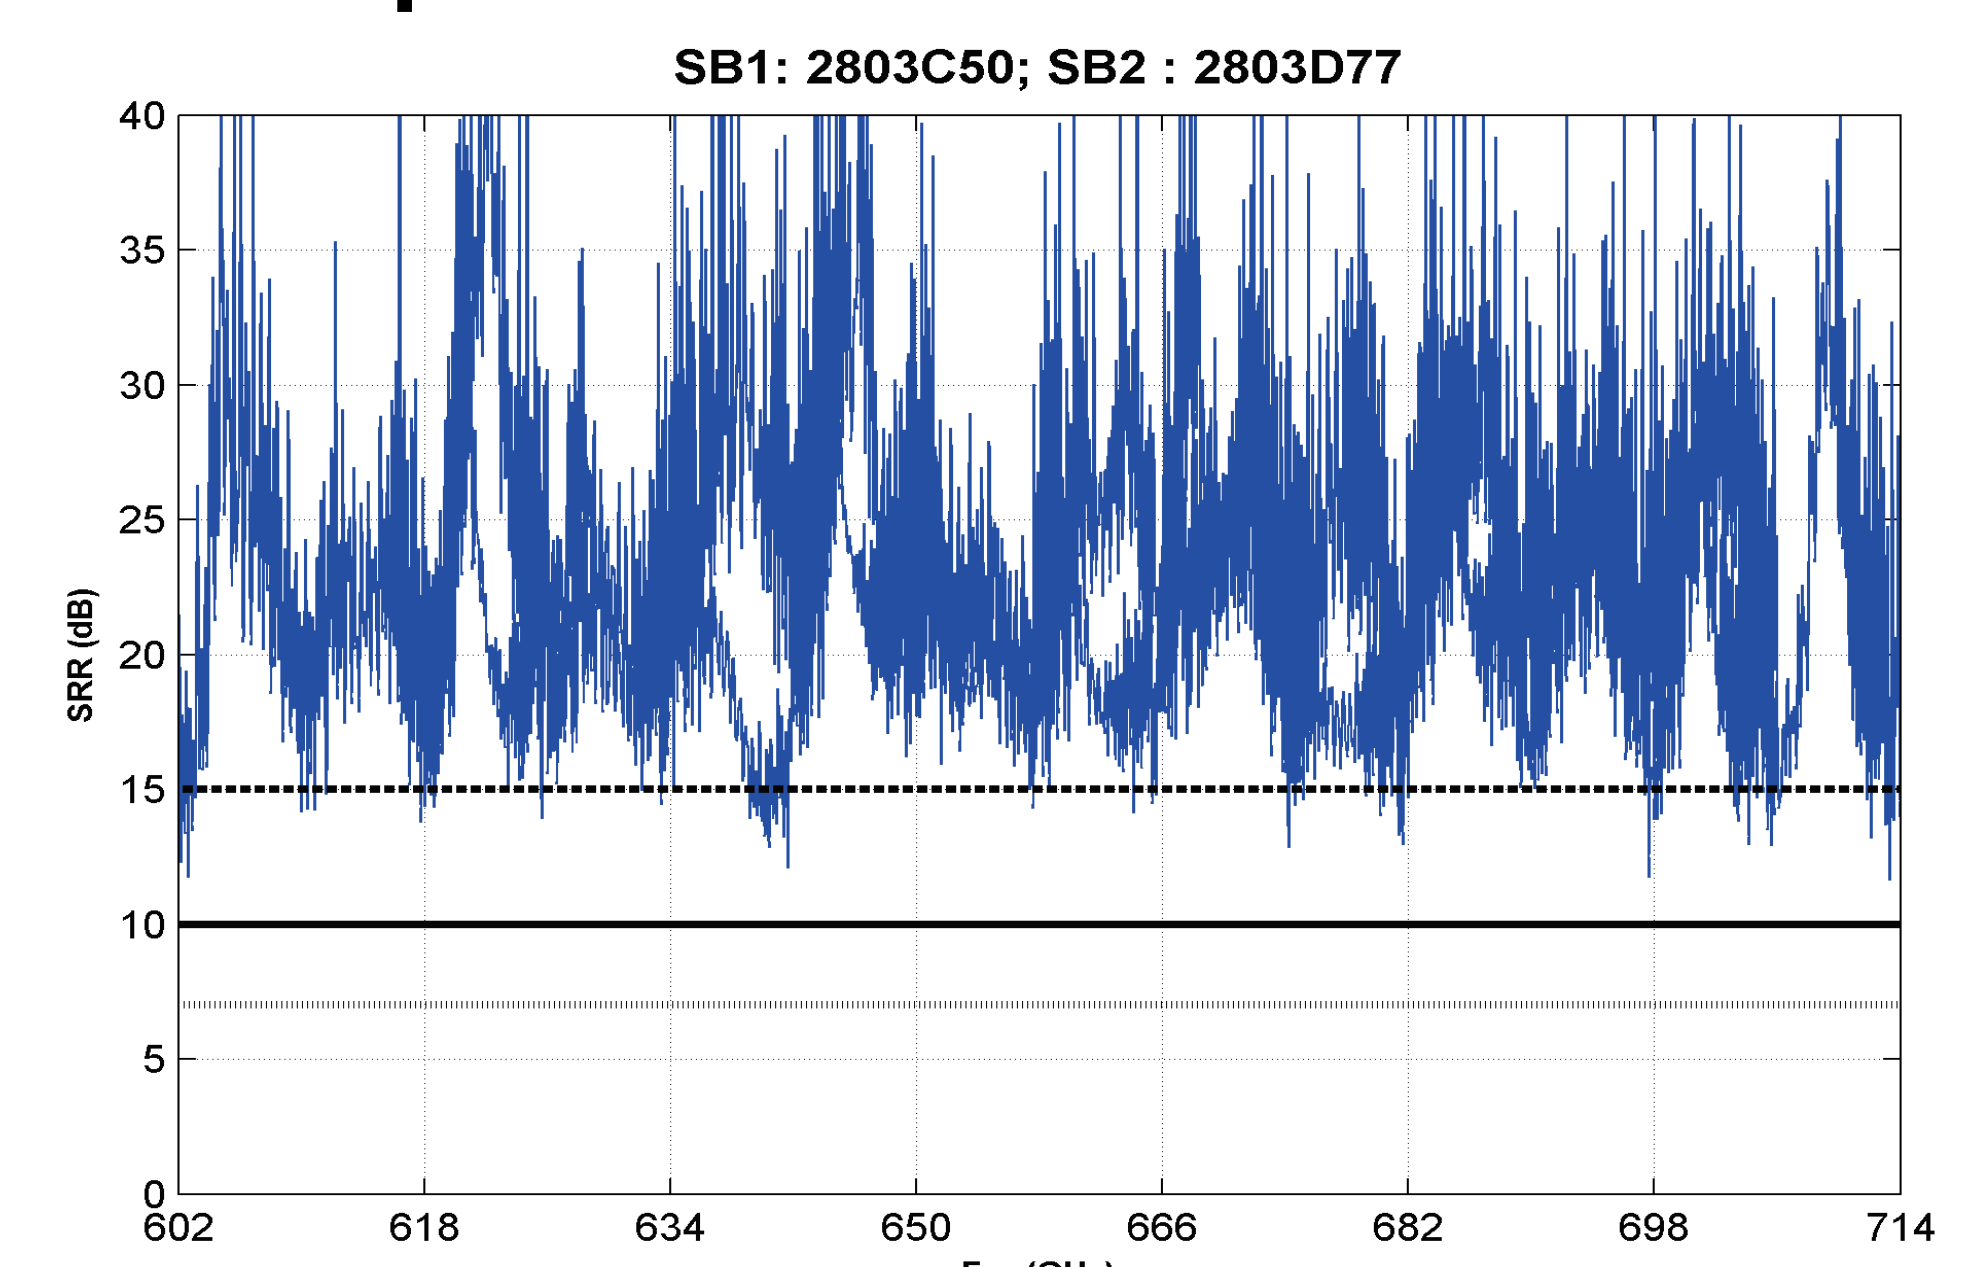

Measured sideband ratio of the system. Note that average level of SBR is about 15dB which allows to reduce system noise

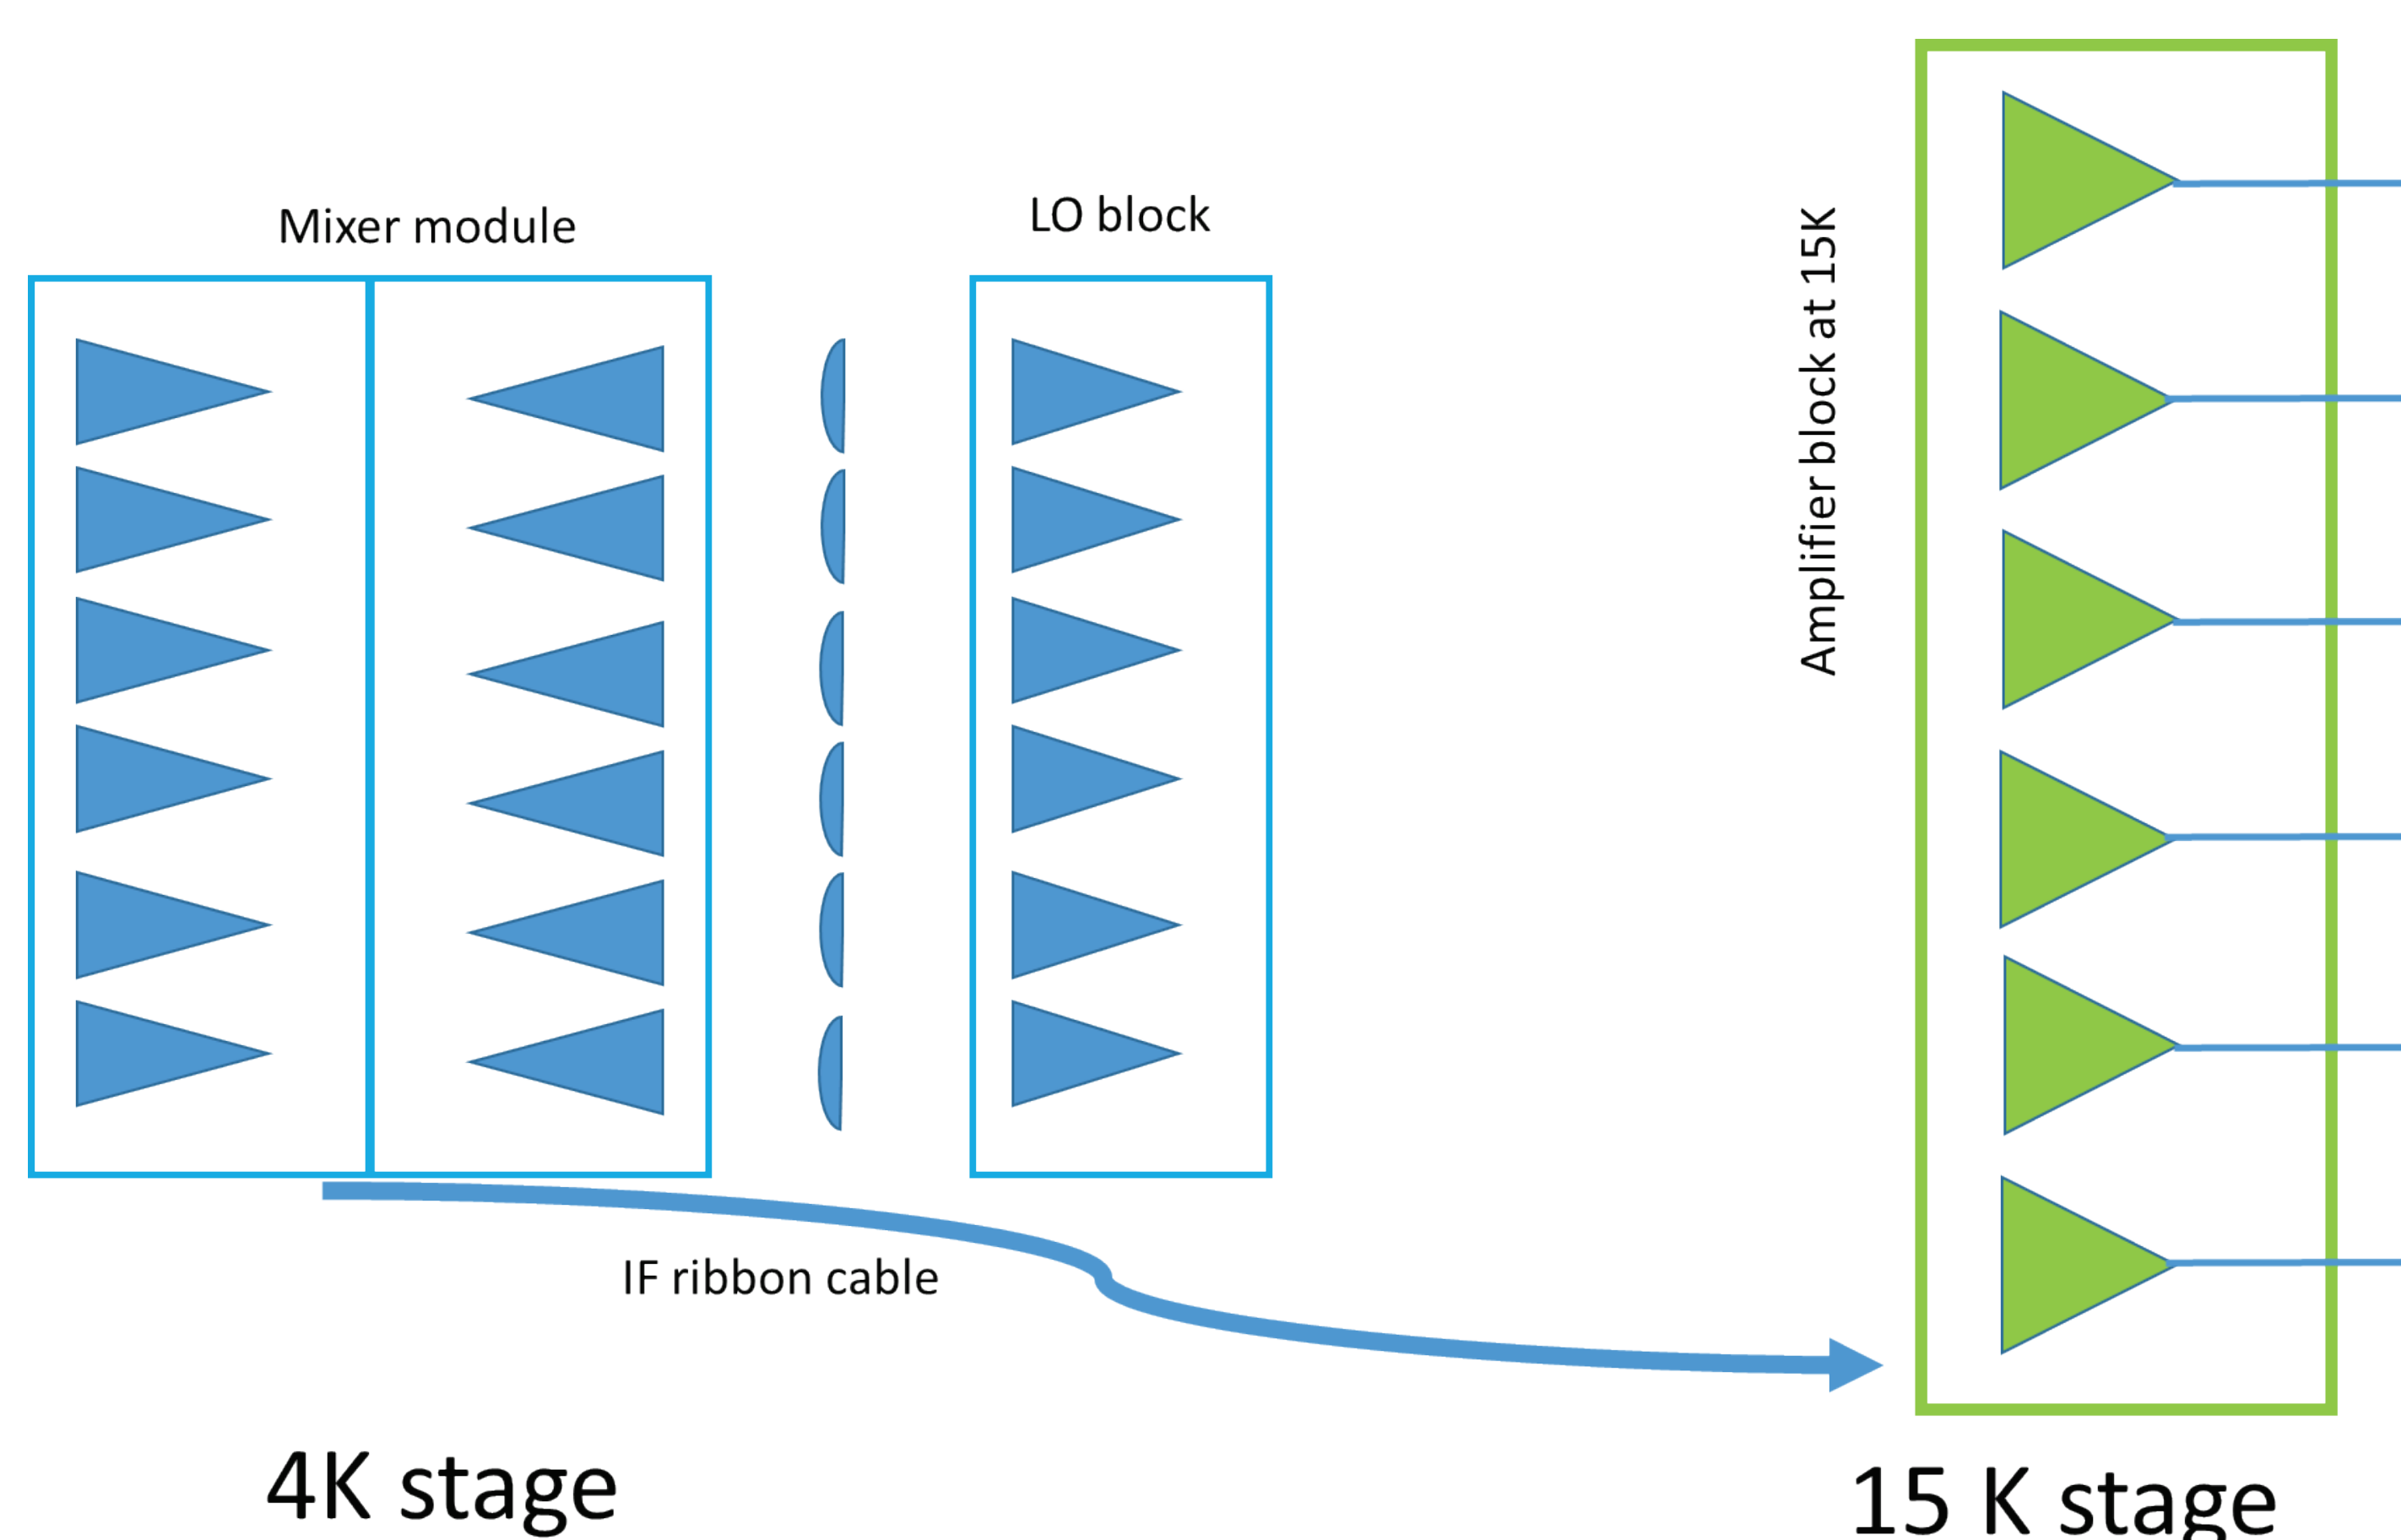

Principle array layout based on building block above which allows to resolve major thermal and element placement problems. Especially IF amplifiers can be placed far away without affecting temperature of mixer module. The array can be built out single pixel mixer modules that can be tested separately to retain state of art performance. Current estimate that 128 pixel array in this configuration is feasible to build.

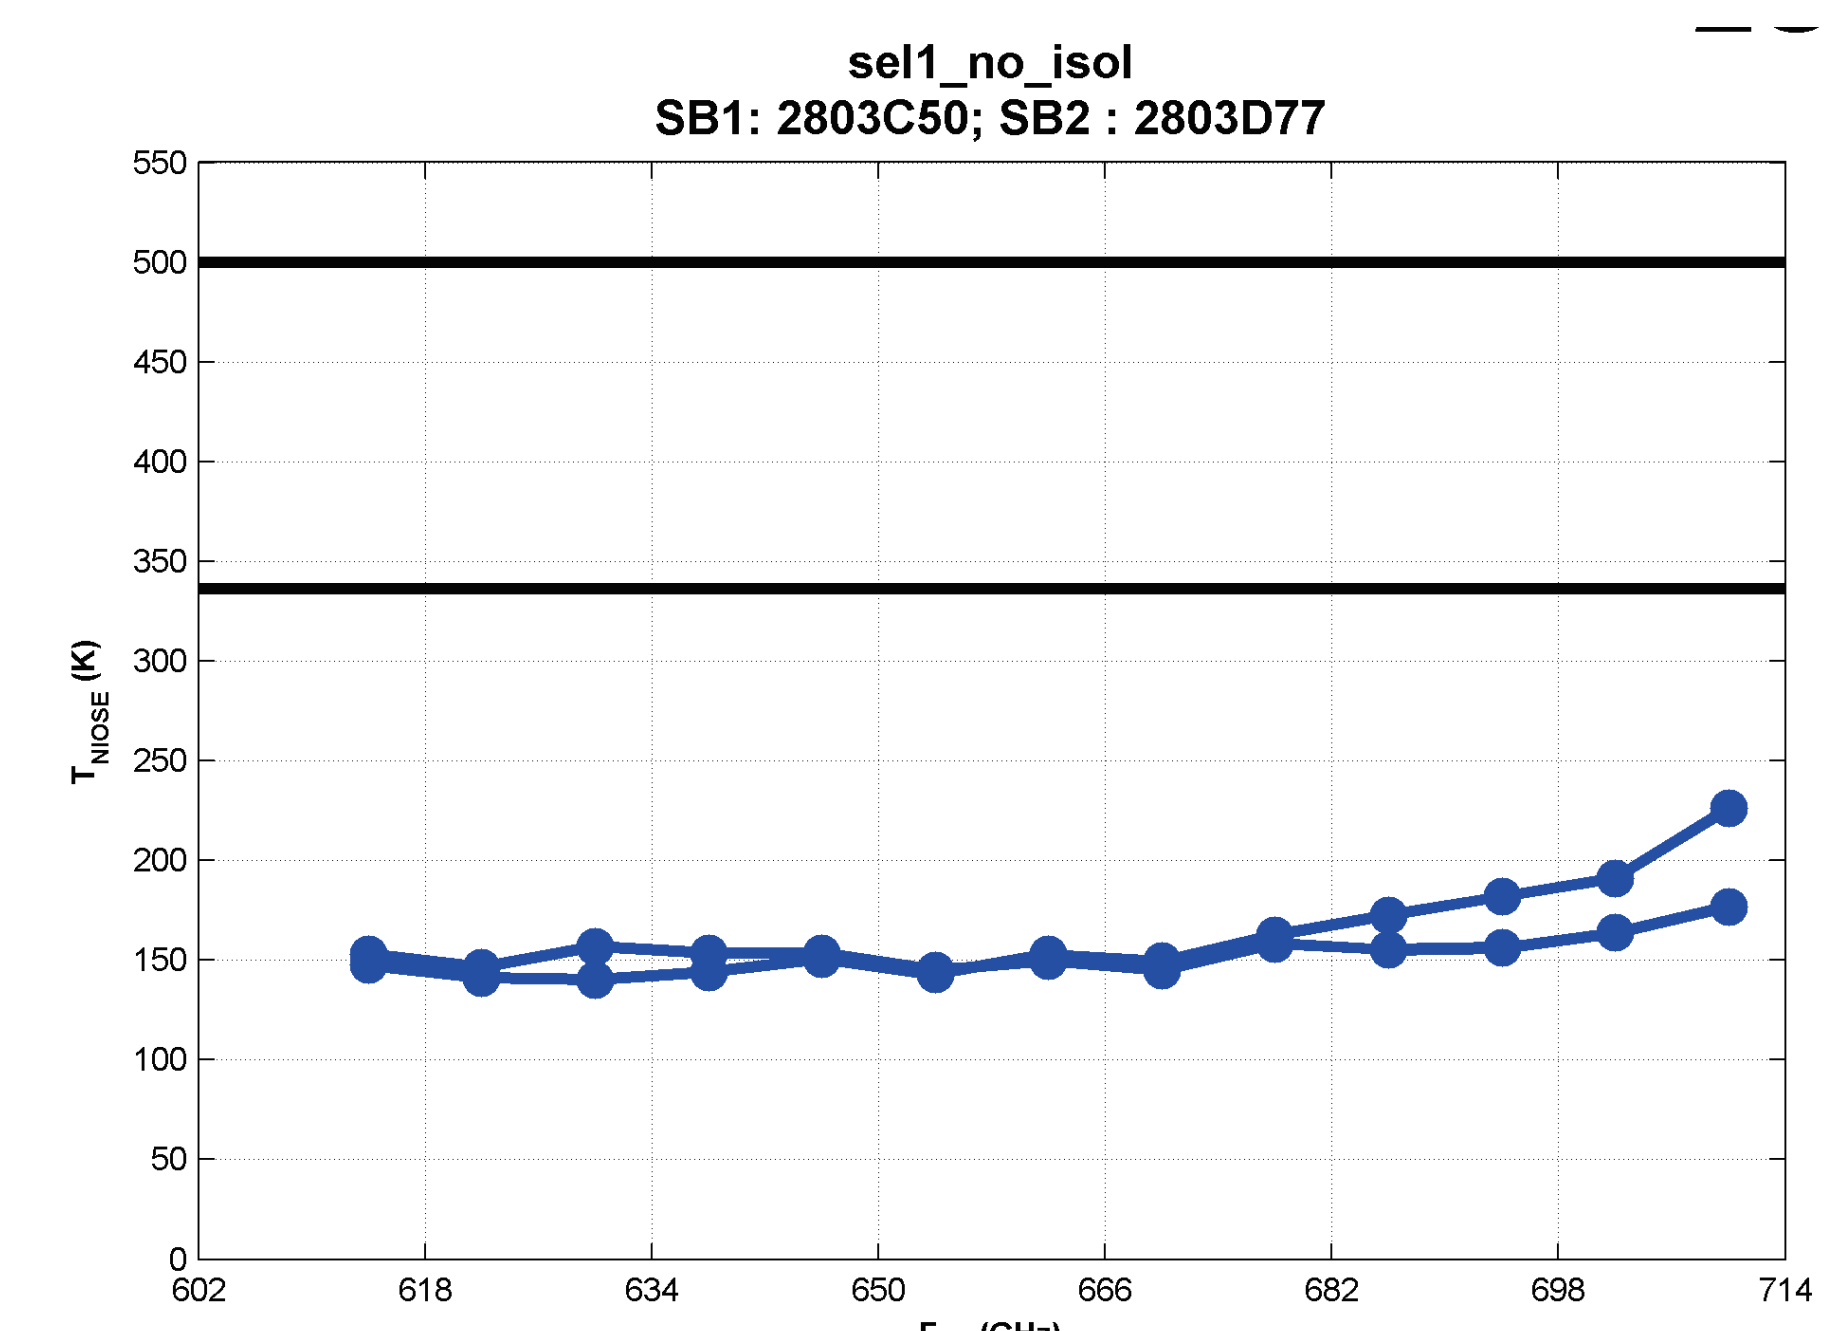

Measured SSB noise temperature. USB and LSB curves. Temperature is averaged over 4-12 GHz IF band.

SUMMARY

- It is very important to maintain competitive mixer performance for array element. Performance is limited by atmosphere, not by quantum limit at high frequency.
- We demonstrated 2SB mixer that interfaces IF amplifier without cryogenic amplifier and through long IF line with very good performance.
- IF Bandwidth is now limited by IF amplifier bandwidth and can be extended